



BX-30



Size (Length x Height)	Using range		Net weight
	Outer diameter	Thickness	
270x60mm	15-30mm	<4mm	0.8kg

Applicable cable: 10kv high and low voltage cables; 70-300 mm² high voltage single core

BH-3008A



Size (Length x Height)	Using range		Net weight
	Outer diameter	Thickness	
260x70mm	15-30mm	<4.5mm	0.78kg

Applicable cable: 10kv high and low voltage cables; 35-300 mm² high voltage single core

BX-50




Size (Length x Height)	Using range		Net weight
	Outer diameter	Thickness	
330x70mm	15-50mm	<4.5mm	1.02 kg

Applicable cable: 10kv high and low voltage cables; 70-500 mm² high voltage single core



BXQ-F-55

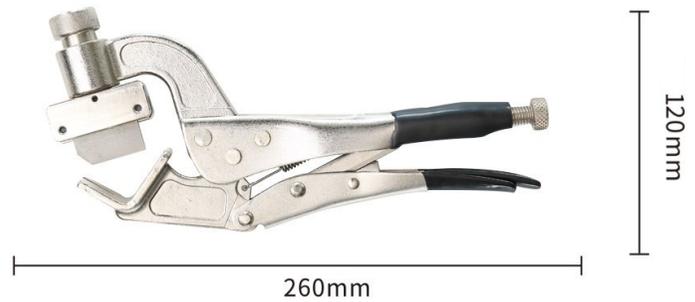

Size (Length x Height)	Using range		Net weight
	Outer diameter	Thickness	
260x120mm	20-55mm	<4.5mm	1.02kg
Applicable cable		10kv high and low voltage cables;70-500 mm ² high voltage single core	

BP-400



Size (Length x Height)	Using range		Net weight
	Outer diameter	Thickness	
240x85mm	15-30mm	<4.5mm	0.96kg
Applicable cable		Within Φ30 mm Al / Cu cable or insulation thickness 4.5 mm	


BX-40B



Size (Length x Height)	Using range		Net weight
	Outer diameter	Thickness	
270x90mm	15-40mm	terminal cut<6mm middle cut<4mm	1.1kg
Applicable cable		wire insulation stripping ≤ 40 mm. stripping thickness terminal stripping <6mm,middle cut <4mm	




BX-40A

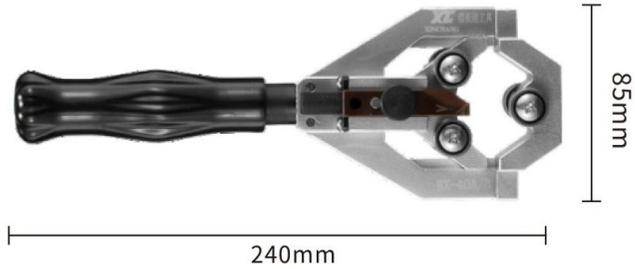

Size (Length x Height)	Using range Outer diameter	Net weight
240x85mm	20-40mm	1.44kg

Applicable cable 10kv cable end main insulation


BX-50A

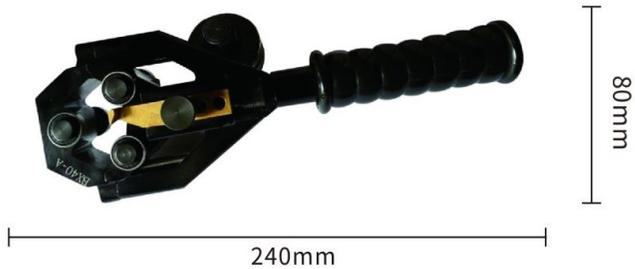

Size (Length x Height)	Using range Outer diameter	Net weight
290x80mm	25-50mm	0.98kg

Applicable cable 10kv cable end main insulation

BX-65A

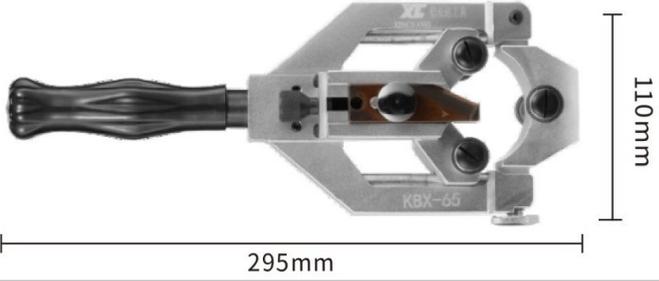


Size (Length x Height)	Using range Outer diameter	Net weight
295x110mm	30-65mm	2.22kg

Applicable cable 10kv cable end main insulation

CABLE STRIPPERS



BX-90

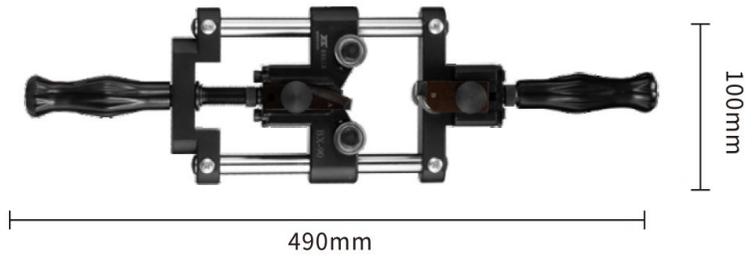

Size (Length x Height)	Using range Outer diameter	Net weight
490x100mm	40-90mm	2.9kg

Applicable cable

110kv cable end main insulation

BX-105



Size (Length x Height)	Using range Outer diameter	Net weight
570x230mm	50-105 mm	2.22kg

Applicable cable

110kv cable end main insulation