



Product Parameters

0.75Kw Double loop electromagnetic pump
Easy to operate and widely us



Motor Power	0.75Kw	Working Voltage	220V
High Pressure	70 MPa	Low Pressure	7Mpa
High Pressure Flow	0.9L/min(above 7 Mpa)	Low Pressure Flow	5L/min(below 7 Mpa)
Package	Wooden Case	Net Weight	32Kg(Without oil)
Oil Reserves	7L(You can increase the oil tank,oil pump using 15# hydraulic oil,15# below the thinner the better)		



Application

Hydraulic pump can be equipped with the following split type hydraulic tools





Product Detail

Aluminum chassis



Shock gauge



Interface



Hydraulic oil injection port

Oil drain hole





01 Shockproof pressure gauge

Effectively avoid the effects after vibration, Instrument indication is stable and clear.



Copper interface


02

All copper, high hardness, No rust, long service life



03 Double circuit double magnetic valve configuration

Wiring control switch switching is convenient and labor-saving compared with manual double-circuit commutation is more simple improve the work efficiency

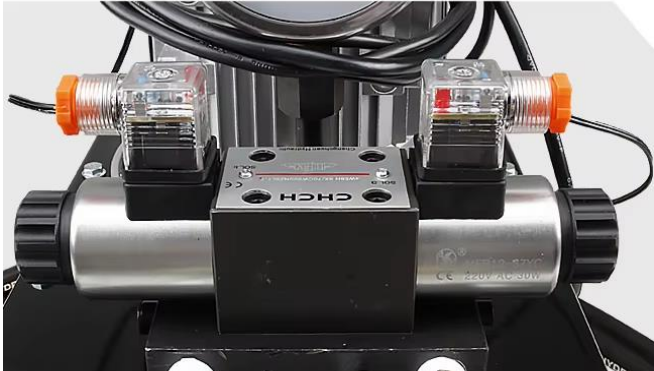

Easy to use

04

The product is small, the pressure is strong, the structure is simple Greatly improved the work efficiency.



05 Oil Filler

Hydraulic pump must add 15# to 46# anti-wear hydraulic oil to work normally, refueling must exceed the oil window.



Hydraulic system oil level indicator

06

Thermometer, records the temperature of the working fluid in the tank.

