



Product Parameters

0.75Kw Single-loop electric pump




Motor Power	0.75Kw	Working Voltage	220V/380V
High Pressure	70Mpa	High Pressure Flow	0.9L/Min
Speed	1400r/min	Package	Wooden Case
Net Weight	21.4Kg	Gross Weight	26 kg
Oil Reserves	8L / 7L Usable		



Application

Hydraulic pump can be equipped with the following split type hydraulic tools

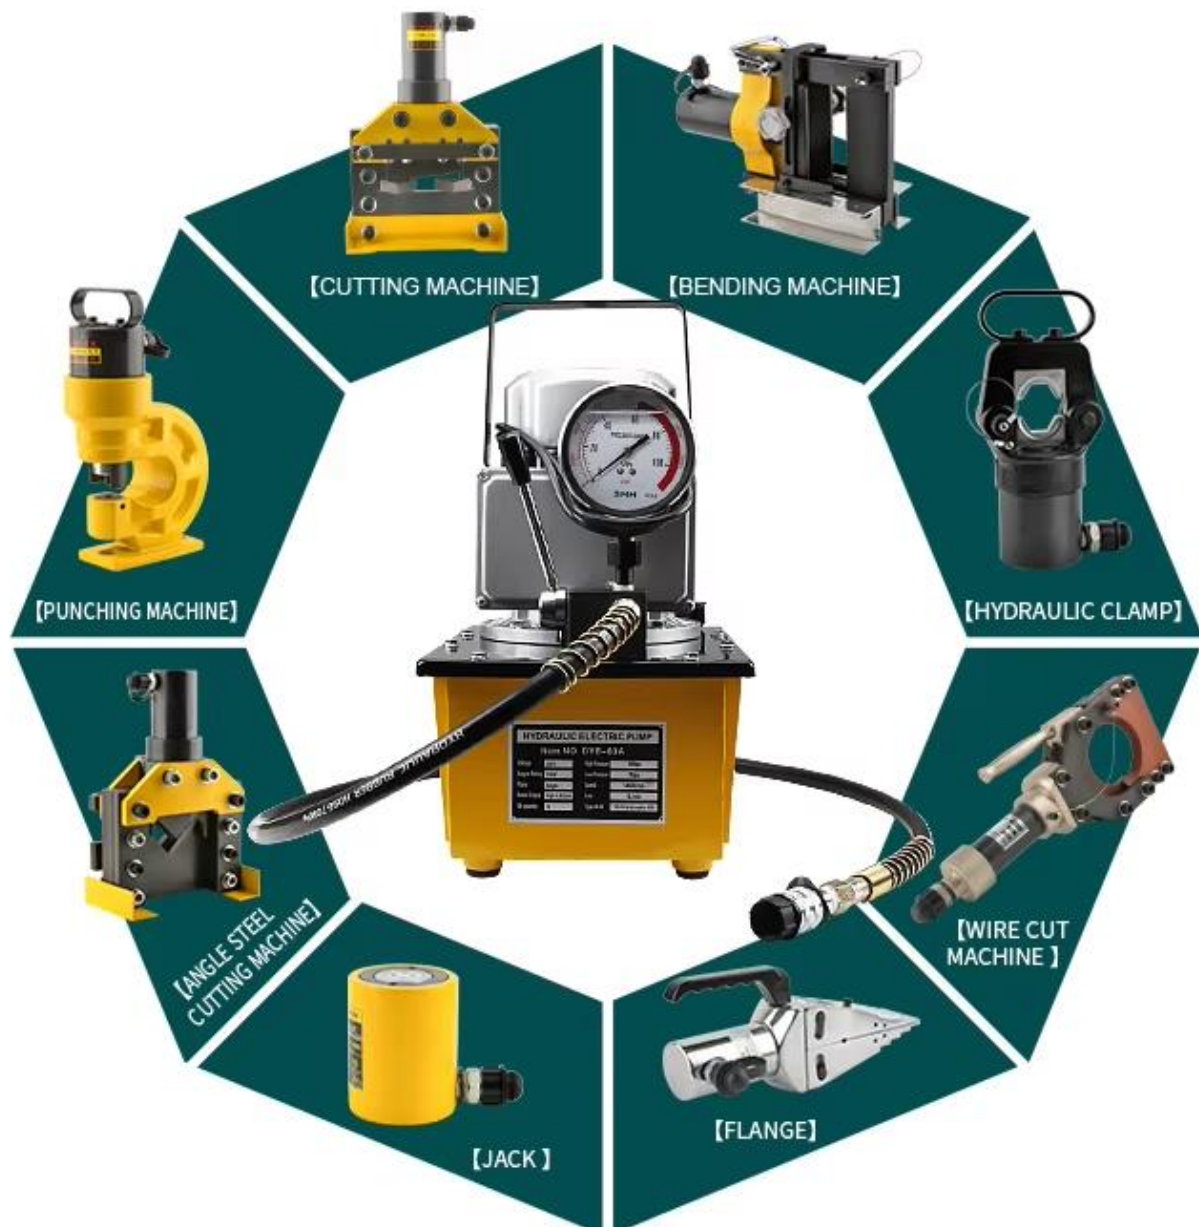



Product Detail



Aluminum chassis

Shock gauge

Manual Pressure Relief Valve

Interface

Hydraulic oil injection port

Oil tank

Oil-out



HYDRAULIC ELECTRIC PUMP			
Voltage	120V	High Pressure	1000
Output Rating	2500	Low Pressure	1000
Power	1500W	Speed	1400RPM
Rated Output	High 3.5 L/min	Size	10/100
Capacity	5L	Typical Oil	100 Hydraulic Oil

**01 Shockproof pressure Gauge**

Effectively avoid the effects after vibration, Instrument indication is stable and clear.

**Copper interface 02**


All copper, high hardness, No rust, long service life

**03 Copper in creating**

Aluminum casing, copper core, Good stability, high efficiency

**Manual Pressure relief valve 04**

Manual valve control oil return oil, pull down in the pressure relief state, pull up in the pressure state

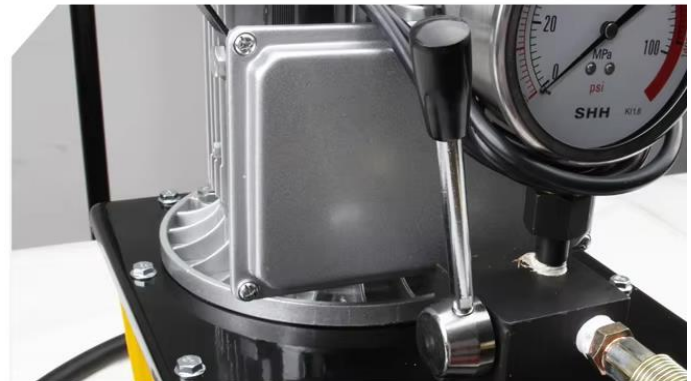**05 Oil Filler**

Hydraulic pump must add 15# to 46# anti-wear hydraulic oil to work normally, refueling must exceed the oil window.

**Hydraulic system oil level indicator 06**

Thermometer, records the temperature of the working fluid in the tank.

