



## Product Parameters

750W double circuit electric pump,  
easy to operate and widely used



Motor Power	750W	Low Pressure Flow	5L/min
Working voltage	220V	Speed	1400r/min
High Pressure	70Mpa	Frequency	50Hz-60Hz
High Pressure Flow	0.9L/min	Oil Reserves	7L
Low Pressure	7Mpa	Net weight	22.8KG(oil free)



## Application

Hydraulic pump can be equipped with the following split type hydraulic tools





## Product Detail



Shock gauge



Aluminum chassis

Hydraulic oil injection port



Interface



Oil tank

Oil drain hole





## Product Detail Presentation


### Shockproof pressure gauge **1**

Effectively avoid the effects after vibration, Instrument indication is stable and clear.



### Copper interface **2**

All copper, high hardness, No rust, long service life

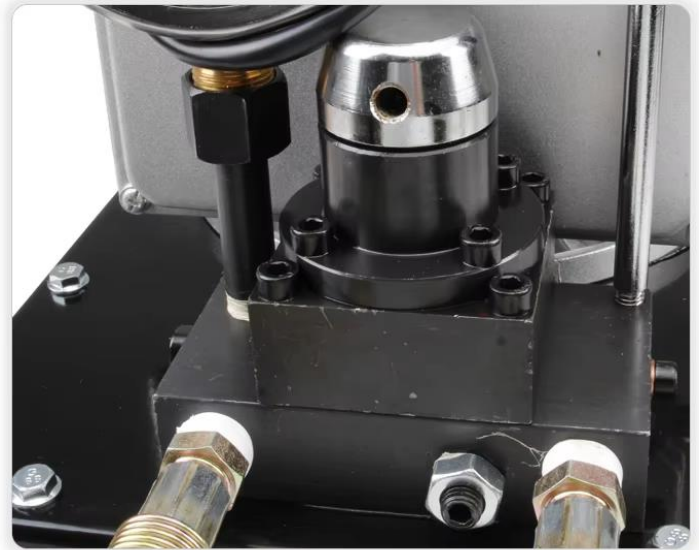

### Easy to use **3**

This product is small, the pressure is strong, the structure is simple. Greatly improved the work efficiency.



### Oil Filler **4**

Hydraulic pump must add 15# to 46# anti-wear hydraulic oil to work normally, refueling must exceed the oil window.





Copper in creating **5**

Aluminum casing,copper core,Good stability,high efficiency



Hydraulic system oil level indicator **6**

Thermometer, records the temperature of the working fluid in the tank.

