



Product Parameters

750W double circuit electric pump,
easy to operate and widely used



Motor Power	750W	Low Pressure Flow	5L/min
Working voltage	220V	Speed	1400r/min
High Pressure	70Mpa	Frequency	50Hz-60Hz
High Pressure Flow	0.9L/min	Oil Reserves	7L
Low Pressure	7Mpa	Net weight	22.8KG(oil free)



Application

Hydraulic pump can be equipped with the following split type hydraulic tools





Product Detail



Shock gauge



Aluminum chassis

Hydraulic oil
injection port



Interface



Oil tank

Oil drain hole





Product Detail Presentation


Shockproof pressure gauge **1**

Effectively avoid the effects after vibration, Instrument indication is stable and clear.



Copper interface **2**

All copper, high hardness, No rust, long service life

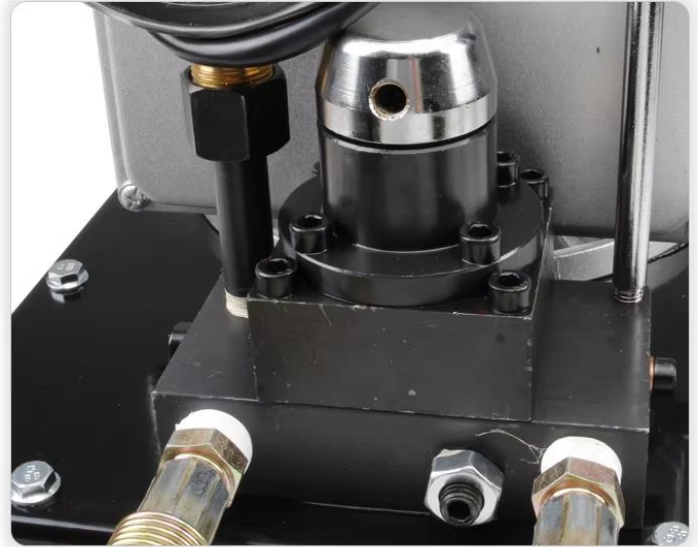

Easy to use **3**

This product is small, the pressure is strong, the structure is simple. Greatly improved the work efficiency.



Oil Filler **4**

Hydraulic pump must add 15# to 46# anti-wear hydraulic oil to work normally, refueling must exceed the oil window.





Copper in creating **5**

Aluminum casing, copper core, Good stability, high efficiency



Hydraulic system oil level indicator **6**

Thermometer, records the temperature of the working fluid in the tank.

