




Can choose different dies for different kinds of terminals crimping



Ferrules, 25, 35, 50mm2

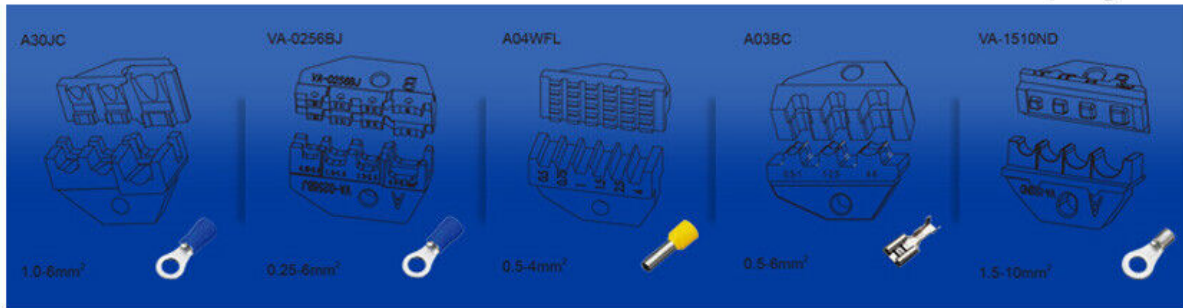

Twin ferrules, 2×0.5, 1.0, 1.5, 2.0, 2.5, 4, 6, 10mm2



Insulated O type or Y type terminals, 1.0, 2.0, 2.5, 4.0, 6.0mm2



Non-insulated O type or Y type terminals, 0.5, 1.0, 1.5, 2.0, 2.5, 4.0, 6.0, 10.0mm2



Males or females receptacles, 1.0, 2.0, 2.5, 4.0, 6.0mm2



Contact pin for rectangular connector, 1.0, 2.0, 4.0mm2



Product parameters

Name	Multi-purpose Pneumatic Crimping Machine
Model	FEK-5ND
Crimping range	Insulated terminal, 6.0mm ²
Air pressure range	0.5-0.6MPa
Air Flow	34L/min (Crimping times: 30 times per minute)
Output	1.3T(at 0.5MPa)
Weight	2.0Kg
Overall dimension	230 × 187 × 100mm

Accessories included

Name	Quantity
Air tube	1
Foot witch(Common type or pressure protected type for selection)	1
Pressure regulating valve (matched with airfilter or lubricator)	1
Operation instruction	1

