



## Product Parameters

### Hydraulic Cylinder FPY-301



Model	FPY-301	Stroke	14mm
Tonnage	30T	Closed Height	61mm
Inner diameter	75mm	Outer diameter	123mm



## Product Detail



With two holes



NPT 3/8 Male Coupler




Barrier-free jacking






In order to operate correctly, all cylinders need to be connected to a solid lifting surface. Cylinder damage can result from the use of cylinders on sandy, earthen or loose surfaces.

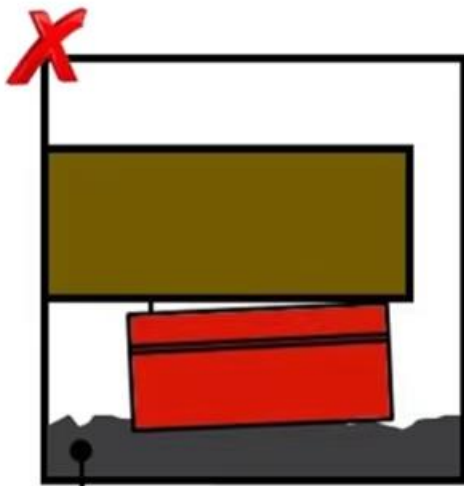

Rough Surface

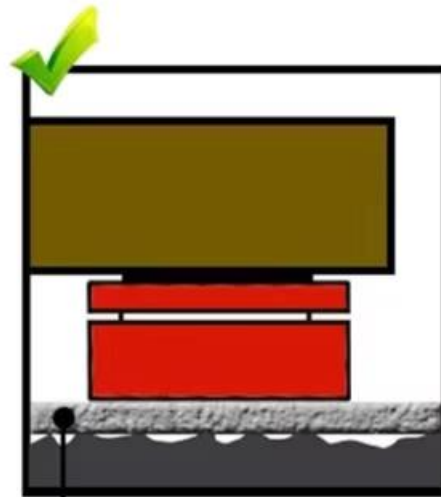

Flat Raised Surface

## Suitable for a variety of environments

Commonly used in Electric Power , Chemical Industry,  
Bridge Industry and so on.





## Product Detail Presentation

### Male connector + dust cap **1**

Precise and convenient connection, effectively prevent dust



### Smooth Surface **2**

Clear circle mark, firmly fixed, not to explode cylinder.



### working status **3**

Working jacking, non-stick cylinder, full tonnage, full travel.



### Requires hand pump or electric pump **4**

This product does not come with a pump and needs to be purchased separately

