




Hand Operated Hydraulic Crimping Tool, HHY-510

Designed for the electrical contractor and electric utility lineman who is confronted with larger cable diameter and larger connectors.

Built-in safety valve

Characteristics:

- Strong, lightweight fiberglass handles.
- Wide open C crimping head, rotating 180 degree
- Twist handle pressure release
- Built-in pressure relief valve for overload protection
- Two-stage pumping action for rapid ram advance to the connector hold position with minimum pumping action.
- Molded plastic carry case.

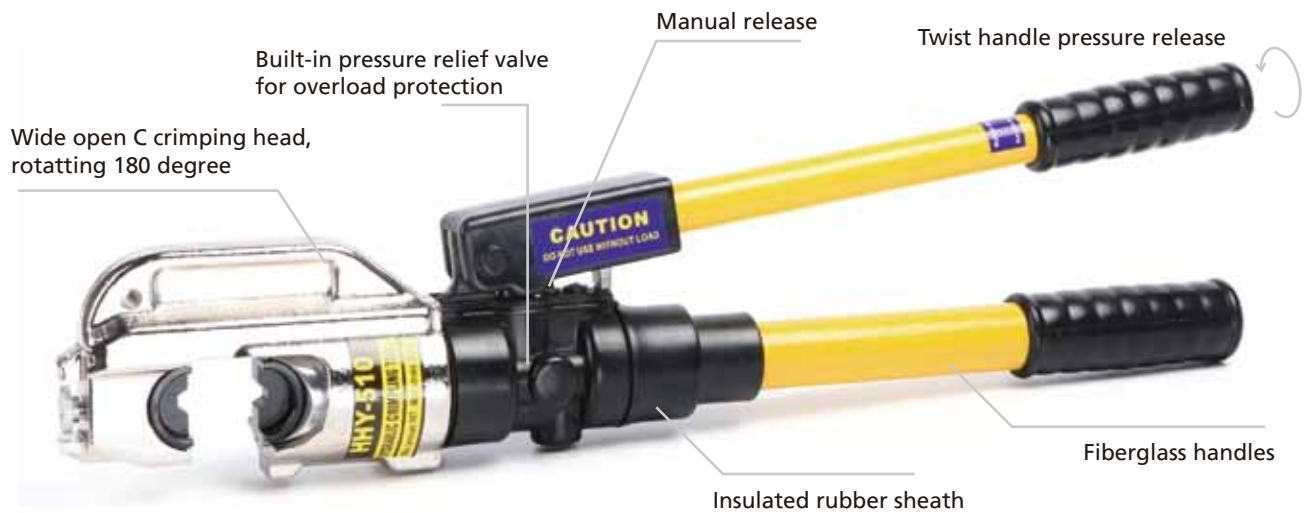

Model	HHY-510
Hydraulic Ram Output	11 Ton
Ram Stroke	38 mm
Crimping range(mm ²)	16-400
Crimp pattern	Hexagonal type
Crimping dies(mm ²)	50,70,95,120,150,185,240,300,400
G.W.(kg)	11.9
Packing size(mm)	770X230X130



Hand Operated Hydraulic Crimping Tool, HHY-430

Designed for the electrical contractor and electric utility lineman who is confronted with larger cable diameter and larger connectors.

Built-in safety valve



Characteristics:

- Strong, lightweight fiberglass handles.
- Wide open C crimping head, rotating 180 degree
- Twist handle pressure release
- Built-in pressure relief valve for overload protection
- Two-speed ram advances fast and shifts to lower speed to complete the crimp.
- Molded plastic carry case.

Model	HHY-430
Hydraulic Ram Output	11 Ton
Ram Stroke	32 mm
Crimping range(mm ²)	16-400
Crimp pattern	Hexagonal type
Crimping dies(mm ²)	50,70,95,120,150,185,240,300,400
G.W.(kg)	11
Packing size(mm)	770X230X130

Hand Operated Hydraulic Crimping Tool, HHY-35

Designed for the electrical contractor and electric utility lineman who is confronted with larger cable diameter and larger connectors.

Built-in safety valve



Characteristics:

- Strong, lightweight fiberglass handles.
- Wide open C crimping head, rotating 180 degree
- Twist handle pressure release
- Built-in pressure relief valve for overload protection.
- Two-speed pump to reduce cycle time.
- Molded plastic carry case.

Model	HHY-35
Hydraulic Ram Output	11 Ton
Ram Stroke	32 mm
Crimping range(mm ²)	16-400
Crimp pattern	Hexagonal type
Crimping dies(mm ²)	50,70,95,120,150,185,240,300,400
G.W.(kg)	10.9
Packing size(mm)	770X140X225