




Hydraulic Spreader



Maximum Lifting Force:	16 ton (157kN)
Lifting Stroke:	21mm
Tip Clearance/Maximum Spread*:	10mm/81.5mm
Maximum Operating Pressure:	700 bar

- Requires very small access gap of only 10mm
- Lifting force 16 ton at 700 bar hydraulic pressure
- Each step can spread under full load
Straight vertical lifting
- Unique interlocking wedge design: no first step bending and risk of slipping out
- Single-acting, spring return cylinder
- Lifting wedge LW-16 includes safety block SB-2

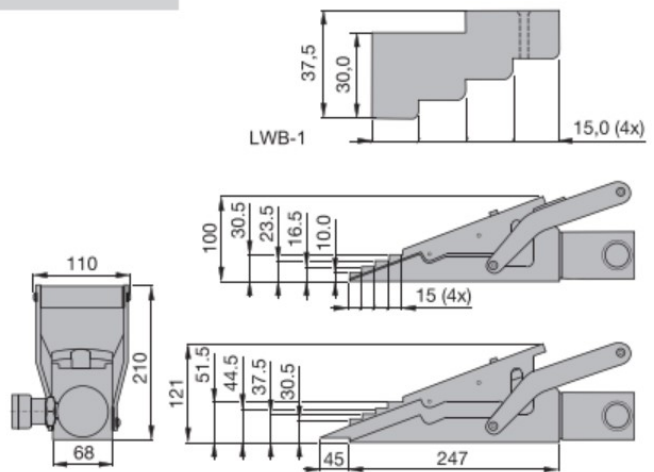

For lifting heavy equipment with minimum floor clearance the LW-16 is the ideal tool.

Maximum Lifting Force	Lifting Stroke	Model Number	Tip Clearance	Maximum Operating Pressure	Oil Capacity	
ton (kN)	(mm)		(mm)	(bar)	(cm ³)	(kg)
16 (157)	21	LW-16	10	700	78	9.0

Use optional stepped block LWB-1 to increase wedge lifting height by 30 mm.
 • Using LWB-1.

